


美國克萊克四胞胎 NJDF

Clack®



產品特色

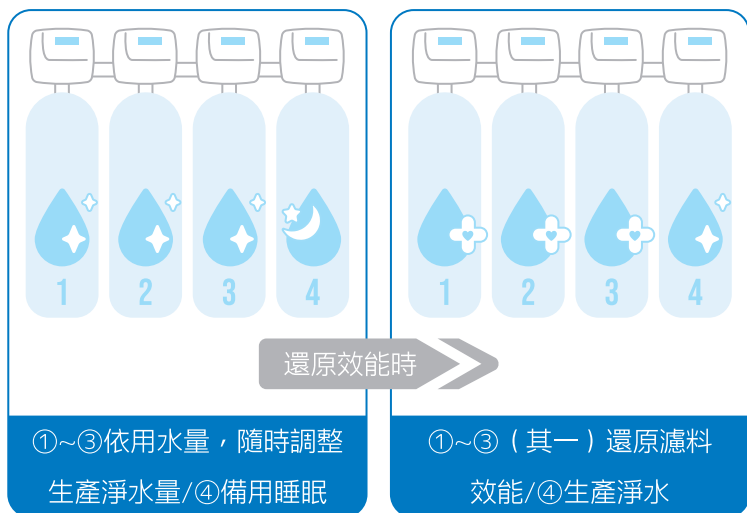

AI 人工智慧功能
產水時，隨時偵測用水，
僅在必要流速下啟動必要罐數
（可選擇關閉此功能）



小空間大容量應變高
四閥四罐設計，縮小空間需求，
分散設備風險



維持產能供應不間斷



省時免等待



即時維護有保障



獨特模式省水省鹽



配合需求好彈性



Clack 原廠 JS 藍光控制閥
通過 18 項認證 & 相關證明

四胞胎 NJDF / 建議需求型號表

每小時最大出水流速

進水硬度 (ppm) / 設備再生後，至下次再生前，可處理多少水量 (噸)

1 吋型號	濾料量	100	150	200	250	300	350	400	450	500	550	600
NJDF-600K 18 噸	150L × 4	176.3	117.5	88.2	70.5	58.8	50.4	44.1	39.2	35.3	32.1	29.4
NJDF-800K 24 噸	200L × 4	235.1	156.7	117.5	94.0	78.4	67.2	58.8	52.2	47.0	42.7	39.2

1.5 吋型號

NJDF-1200K 30 噸	300L × 4	352.6	235.1	176.3	141.1	117.5	100.8	88.2	78.4	70.5	64.1	58.8
NJDF-1600K 36 噸	400L × 4	470.2	313.5	235.1	188.1	156.7	134.3	117.5	104.5	94.0	85.5	78.4

2 吋型號

NJDF-2000K 60 噸	500L × 4	587.7	391.8	293.9	235.1	195.9	167.9	146.9	130.6	117.5	106.9	98.0
NJDF-2400K 72 噸	600L × 4	705.3	470.2	352.6	282.1	235.1	201.5	176.3	156.7	141.1	128.2	117.5
NJDF-4800K 78 噸	1200L × 4	1410.5	940.4	705.3	564.2	470.2	403.0	352.6	313.5	282.1	256.5	235.1

耗鹽量計算公式：樹脂量 × 0.1 = 一次再生要用的鹽錠總重量 (KG)

表格用計算公式：樹脂量 × 43.1 ÷ 1.1 ÷ 進水硬度 ppm = 水處理總量 (噸)

軟水機建議選項：戶外硬殼保護蓋、前置雜質過濾器、KW8 食品級樹脂、ATS 軟化樹脂、ATS 軟化鹽錠

管線安裝示意圖 (實際安裝依現場需求調整)



Made in the USA



Clack 官網



Clack 影片



認證 & 證明書