

**C-100E**  
**Strong Acid**  
**Cation Exchange Resin**

(For use in water softening applications)

## Technical Data

### PRODUCT DESCRIPTION

**Purolite C-100E** is a high purity premium grade bead form conventional gel polystyrene sulphonate cation exchange resin designed expressly for the treatment of foodstuffs, beverages, potable waters, and water used in the processing of food. Its specification is such that it will exceed the relevant EEC requirements, and the resin is in compliance with the U.S. Food & Drug

Administration Code of Federal Regulations section 21, paragraph 173.25; for use in the treatment of foods for human consumption. Its high bead integrity, excellent chemical and physical stability, and very low extractibles content play a large part in its successful employment in these areas.

Typical Physical & Chemical Characteristics	
Polymer Matrix Structure	Crosslinked Polystyrene Divinylbenzene
Physical Form and Appearance	Clear spherical beads
Whole Bead Count	90% min.
Functional Groups	R-SO <sub>3</sub> <sup>-</sup>
Ionic Form, as shipped	Na <sup>+</sup>
Shipping Weight (approx.)	850 g/l (53 lb/ft <sup>3</sup> )
Screen Size Range: - U.S. Standard Screen	16 - 50 mesh, wet
Particle Size Range	+1.2 mm <5%, -0.3 mm <1%
Moisture Retention, Na <sup>+</sup> form	46 - 50%
Swelling Na <sup>+</sup> → H <sup>+</sup> Ca <sup>++</sup> → Na <sup>+</sup>	5% max. 8% max.
Specific Gravity, moist Na <sup>+</sup> Form	1.27
Total Exchange Capacity, Na <sup>+</sup> form, wet, volumetric dry, weight	1.9 eq/l min. 4.5 eq/kg min.
Operating Temperature, Na <sup>+</sup> Form	150°C (300°F) max.
pH Range, Stability, Na <sup>+</sup> Form	0 - 14
pH Range Operating, Na <sup>+</sup> Form	6 - 10

Standard Operating Conditions (Co-current Softening of Water)				
Operation	Rate	Solution	Minutes	Amount
Service	8 - 40 BV/h 1.0 - 5.0 gpm/ft <sup>3</sup>	Influent water	per design	per design
Backwash	Refer to Fig. 2	Influent water 5° - 30°C (40° - 80°F)	5 - 20	1.5 - 4 BV 10 - 20 gal/ft <sup>3</sup>
Regeneration	2 - 7 BV/h 0.25 - 0.90 gpm/ft <sup>3</sup>	8 - 20% NaCl	15 - 60	60 - 320 g/l 4 - 10 lb/ft <sup>3</sup>
Rinse, (slow)	2 - 7 BV/h 0.25 - 0.90 gpm/ft <sup>3</sup>	Influent water	30 approx.	2 - 4 BV 15 - 30 gal/ft <sup>3</sup>
Rinse, (fast)	8 - 40 BV/h 1.0 - 5.0 gpm/ft <sup>3</sup>	Influent water	30 approx.	3 - 10 BV 24 - 45 gal/ft <sup>3</sup>
Backwash Expansion 50% to 75%				
Design Rising Space 100%				
"Gallons" refer to U.S. Gallon = 3.785 liters				

## OPERATING PERFORMANCE

The operating performance of **Purolite C-100E** in the sodium cycle depends on:

- The amount and concentration of regenerant used.
- The total hardness of the water to be treated and its sodium content.
- The flowrate of the influent water through the bed.

Performance is usually assessed in terms of the residual hardness in the treated water (traditionally expressed as ppm of CaCO<sub>3</sub>, where 1 ppm CaCO<sub>3</sub> corresponds to a divalent cation concentration of 0.02 meq/l). In municipal water softening, low regeneration levels and high efficiency of removal of the hardness is usually required, since acceptable water quality is usually obtained by a split-stream operation in which a fully-softened stream is blended with the raw water to give the final product. Under beverage manufacturing conditions, or in industrial use for food processing, a suitable treated water, with less than 5 ppm of hardness, can be obtained with a

level of 70-80 kg salt per cubic meter (4.5 - 5 lb/ft<sup>3</sup>) of resin. In ordinary domestic softening, residual hardness at these comparatively low levels is not usually required, and quite high flowrates are often in use with negligible effect on the operating capacity. The most efficient use of regenerant can be achieved by using high concentrations of salt, and giving adequate contact time; the subsequent displacement of the spent regenerant from the bed should also be slow, but the final removal of excess salt should be carried out at normal service flow rates.

Hardness leakage under the standard operating conditions is normally less than 1% of the total hardness of the influent water, and the operating capacities are not significantly affected unless the raw water contains more than about 25% of its exchangeable cations as sodium (or other univalent) ions.


Both the operating capacity and the average leakage of hardness during the run may be calculated for a wide range of conditions from the data given in Figs. 3 through 6.

# HYDRAULIC CHARACTERISTICS


The pressure drop (headloss) across a properly classified bed of ion-exchange resin depends on the particle size distribution, bed depth, and void volume of the exchanger; and on the flowrate and viscosity (and hence on the temperature) of the influent solution. Anything affecting any of these parameters, for example the pres-

ence of particulate matter filtered out by the bed, abnormal compaction of the resin bed, or the incomplete classification of the resin will have an adverse effect, and result in an increased headloss. Typical values of pressure drop across a bed of **Purolite C-100E** are given for a range of operating flow rates in Fig. 1.

**Fig. 1 PRESSURE DROP VS FLOW RATE**

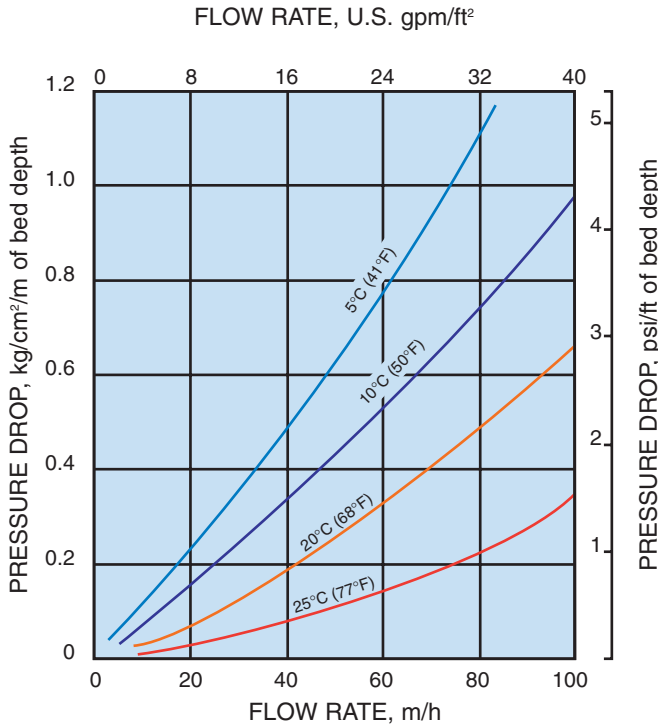

**Fig. 2 BACKWASH EXPANSION**

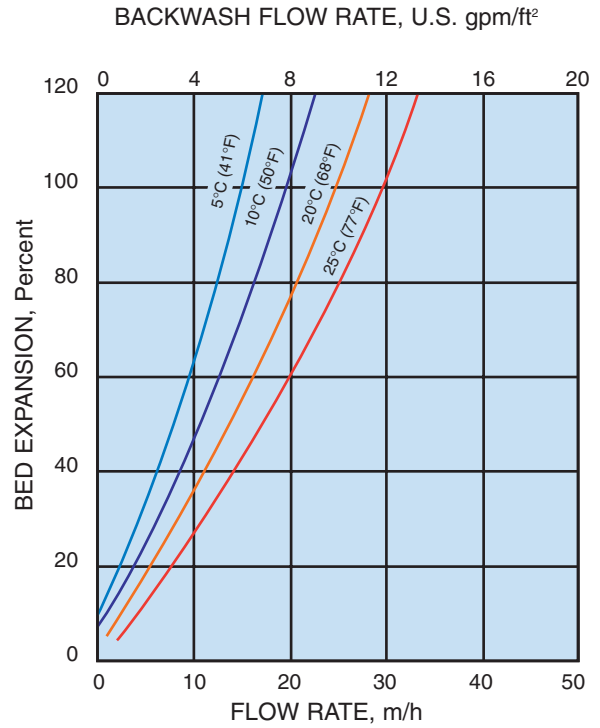

During upflow backwash, the resin bed should be expanded in volume by between 50 and 75%, in order to free it from any particulate matter from the influent solution, to clear the bed of bubbles and voids, and to reclassify the resin particles as much as possible, ensuring minimum resistance to flow. Backwash should be

commenced gradually to avoid an initial surge with consequent carryover of resin particles. Bed expansion increases with flow rate and decreases with temperature, as shown in Fig. 2, above. Care should always be taken to avoid resin loss by accidental overexpansion of the bed.

Conversion of Units	
1 m/h (cubic meters per square meter per hour)	= 0.341 gpm/ft <sup>2</sup> = 0.409 U.S. gpm/ft <sup>2</sup>
1 kg/cm <sup>2</sup> /m (kilograms per square cm per meter of bed)	= 4.33 psi/ft = 1.03 atmos/m = 10 ft H <sub>2</sub> O/ft

## CHEMICAL AND THERMAL STABILITY

**Purolite C-100E** is insoluble in dilute or moderately concentrated acids, alkalies, and in all common solvents. However, exposure to significant amounts of free chlorine, "hypochlorite" ions, or other strong oxidizing agents over long periods of time will eventually break down the crosslinking. This will tend to increase the moisture retention of the resin, decreasing its mechanical strength, as well as generating small amounts of

extractable breakdown products. Like all conventional polystyrene sulphonated resins, it is thermally stable to higher than 150°C (300°F) in the alkali (for instance, sodium) or alkaline earth (calcium and magnesium) salt forms. The free acid form tends to hydrolyse in water at temperatures appreciably higher than 120°C (250°F) thereby losing capacity, as the functional groups are gradually replaced by hydroxyl groups.

## OPERATING CAPACITY CALCULATION


If the regeneration level, influent water analysis, and service flowrate are known, the capacity and leakage curves may be used directly to determine the operating

capacity of the resin in the unit and the residual hardness in the treated water. A specific example of the application of these curves is given below:


<b>INFLUENT WATER</b>			
Cation analysis in:	ppm CaCO <sub>3</sub>	meq/l	gr/U.S. gal
Total hardness	400	8	23
Sodium (& univalents)	<u>100</u>	<u>2</u>	<u>5.8</u>
TDS (total dissolved solids)	500	10	28.8
<b>TREATMENT</b>			
Regeneration with: 160 g/l [10 lb/ft <sup>3</sup> ] of NaCl			
Service Flowrate: 25 m/h [10 U.S. gpm/ft <sup>2</sup> ]			
Leakage endpoint: 5 ppm above permanent (kinetic) leakage figure.			
<b>CAPACITY</b> is calculated as follows:			
Fig. 3 → Base Operating Capacity, C <sub>B</sub> , @ 160 g/l (10 lb/ft <sup>3</sup> ) NaCl = 1.45 eq/l (31.7 kgr/ft <sup>3</sup> )			
Fig. 4 → correction factor, C <sub>1</sub> for 25 m/h & TDS 500 = 0.96			
Hence calculated Operating Capacity, C <sub>B</sub> x C <sub>1</sub> = 1.39 eq/l (30.4 kgr/ft <sup>3</sup> ).			
After applying the conventional 90% "design factor" the value of 1.25 eq/l may be quoted as a design operating capacity. This corresponds to a figure of 27.3 kgr/ft <sup>3</sup> (1.25 eq/l x 21.85 kgr/ft <sup>3</sup> per eq/l).			
<b>LEAKAGE</b> is calculated as follows:			
Fig. 5 → Base Leakage @ 160 g/l NaCl [or 10 lb/ft <sup>3</sup> ] = 2.3 ppm CaCO <sub>3</sub>			
Fig. 6 → correction factor, K <sub>1</sub> , for a TDS value of 500 = 1.1			
Hence permanent (kinetic) leakage = 2.3 x 1.1 = 2.5 ppm CaCO <sub>3</sub>			
<b>NOTES:</b>			
i) The curves given are in fact based on an endpoint leakage of 5 ppm over and above the observed kinetic leakage; operating capacities will differ somewhat if a different criterion is used.			
ii) The curves given are applicable only to influent monovalent ion contents less than or equal to the hardness content; if the water to be treated is atypical in this or other parameters, please contact your local sales office for assistance.			

# PUROLITE C-100E (SOFTENING)


**Fig. 3 OPERATING CAPACITY,  $C_B$**

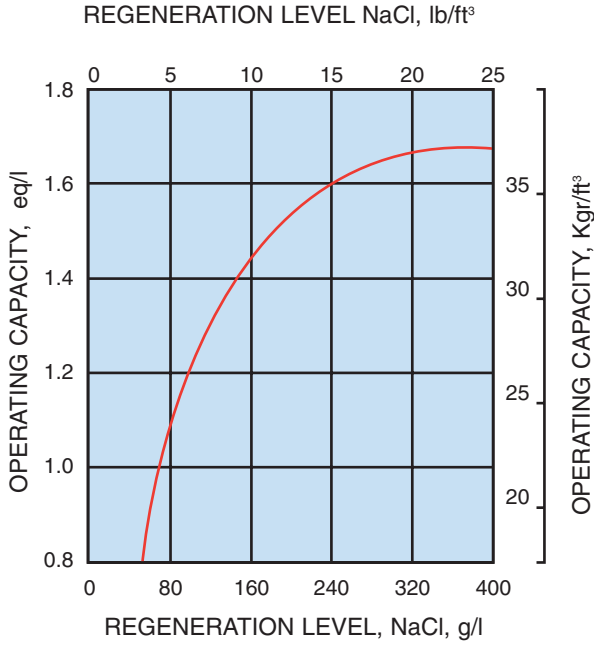


**Fig. 4 EFFECT OF FLOW RATE & TDS ON OPERATING CAPACITY**

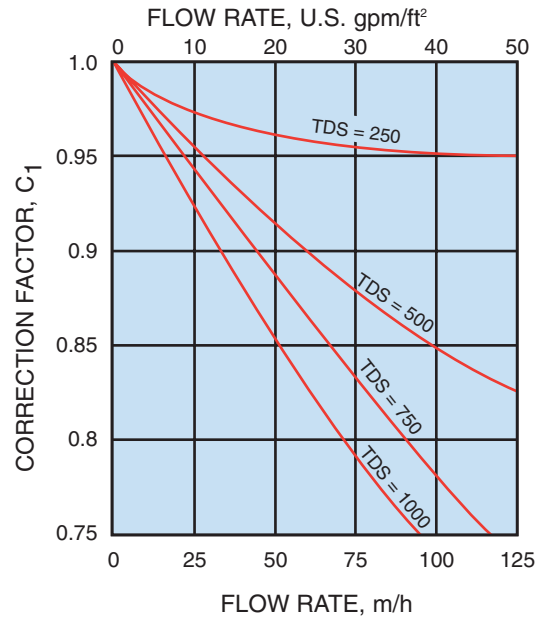

**Fig. 5 HARDNESS LEAKAGE**

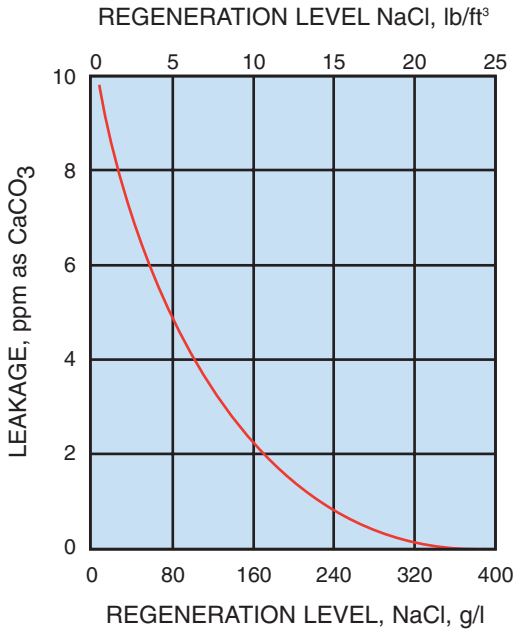

**Fig. 6 CORRECTION FOR TDS**

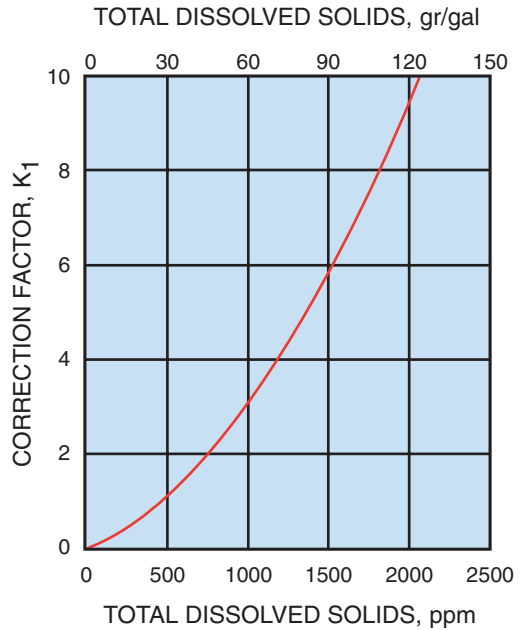

**U.S.A.**

The Purolite Company  
150 Monument Road  
Bala Cynwyd, PA 19004  
Phone: (1) 610-668-9090  
Toll Free: 800-343-1500  
Telefax: (1) 610-668-8139  
Email: [sales@puroliteUSA.com](mailto:sales@puroliteUSA.com)

**TEXAS**

The Purolite Company  
1700 West Loop South  
Suite 740  
Houston, TX 77027  
Toll Free: 800-562-6488  
Telefax: (1) 713-627-7890

**CANADA**

The Purolite Company  
625 Wabanaki Drive  
Unit #2  
Kitchener, Ontario N2C 2G3  
Toll Free: 800-461-1500  
or (1) 519-896-6674  
Telefax: (1) 519-896-6679

**UNITED KINGDOM**

Purolite International Limited  
Kershaw House  
Great West Road  
Junction with Lampton Road  
Hounslow, TW5 OBU  
Sales Phone: (44) 181-570-4454  
Telefax: (44) 181-572-7726  
  
European Marketing  
Phone: (44) 181-577-1222  
Telefax: (44) 181-577-1136

**GERMANY**

Purolite Deutschland GmbH  
Harkort Strasse 25  
40880 Ratingen  
Phone: (49) 2102-46033  
Telefax: (49) 2102-443663

**FRANCE**

Purolite International SARL  
34 Avenue Matignon  
75008 Paris  
Phone: (33) 1-4256-4563  
Telex: 648856  
Telefax: (33) 1-4563-3826

**SPAIN**

Purolite Iberica S.A.  
Parc Tecnologic del Valles  
Centre Empreses Noves Technologies  
08290 Cerdanyola del Valles (Barcelona)  
Phone: (34) 3-582-0266  
Telefax: (34) 3-582-0268

**EGYPT**

Purolite International Middle East  
Cairo Liaison Office  
12 Obour Gardens  
Fifth Floor, App. No. 55  
Salah Salem Street  
Nasr City, Cairo  
Phone: (20) 2-4021477  
Telefax: (20) 2-4021478

**ITALY**

Purolite International S.r.l.  
Viale Coni Zugna 29  
20144 Milan  
Phone: (39) 02-481-8145  
Telefax: (39) 02-4801-2359

**ROMANIA**

Purolite Romania  
International Business Center Modern  
B-dul Carol I No. 34-36  
5th Floor  
Bucharest, Sector 2  
Phone: (40) 1-250-5053/5028  
Telefax: (40) 1-250-5999

**POLAND**

Head Office  
Radus Spolka z o.o.  
ul Przebendowskich 33  
81-543 Gdynia  
Phone/Fax: (48) 58-6248118

**GLIWICE**

Radus Spolka z o.o.  
ul Górnych Wałów 25  
44-100 Gliwice  
Phone: (48) 32-315-931  
Telefax: (48) 32-315-931

**SLASK**

Radus Spolka z o.o.  
ul 3 Maja 3/33  
32-600 Oswiecim  
Phone: (48) 33-425-603  
Telefax: (48) 33-425-603

**CZECH & SLOVAK REPUBLICS**

Purolite International  
Nad Mazankou 17  
182 00 Prague 8  
Phone: (420) 2-688-1086  
Telefax: (420) 2-688-1086

**RUSSIA**

Head Office  
Purolite International  
10th Floor  
36 Lyusinovskaya Street  
Moscow  
Phone: (7) 095-564-8120  
Telefax: (7) 095-564-8121

**ST. PETERSBURG**

Purolite International Limited  
12 Building A Tambovskaya St.  
St. Petersburg  
192007 Russian Federation  
Phone: (7) 812-327-8530  
Telefax: (7) 812-327-9079

**KAZAKHSTAN**

Purolite RH Limited  
Office 205  
240 Dostyk AV.  
Almaty 480051  
Phone: (7) 3272-641-234  
Telefax: (7) 3272-641-234

**SINGAPORE**

Purolite International (Singapore)  
PTE Limited  
32-04 The Concourse  
300 Beach Road, 199555  
Phone: (65) 297-0889  
297-1453  
Telefax: (65) 297-1986

**CHINA**

Head office  
Purolite (China) Company, Ltd.  
Chengguan Town  
Deqing County  
Zhejiang Province 313200  
Phone: (86) 572-842-2908  
Telefax: (86) 572-842-3954

**TAIWAN**

Purolite International  
16F-2, No. 191  
Fu-hsing N. Road, Taipei  
Phone: (886) 2-546-7078  
Telefax: (886) 2-546-7069

**MEXICO**

Purolite International, S.A. De C.V.  
World Trade Center  
Montecito 38, Piso 33, Oficina-19  
Mexico D.F. 03810  
Phone: (52) 5-488-0904  
Telefax: (52) 5-488-0906

**UKRAINE**

Purolite International Limited  
2 Korolenko Street.  
Dnepropetrovsk 320070  
Phone: (38) 0562-320-065  
0562-320-066  
Telefax: (38) 0562-320-067

**KOREA**

Purolite International (Korea) LLC  
Dae Yeon Bldg., Suite 403  
943-30 Daechi-dong  
Kangnam-gu, Seoul  
Phone: (82) 2-3453-7062/7063  
Telefax: (82) 2-3453-7064